


Muslin Buffs

All Sattex Buffs Are 100% COTTON


MIDGET BUFFS

Midget Buffs are used for buffing and polishing small parts on mandrels or small tapered spindles. Standard midget buffs are made with 80 x 80 material available in sizes ranging from 7/8" to 2" in diameter.

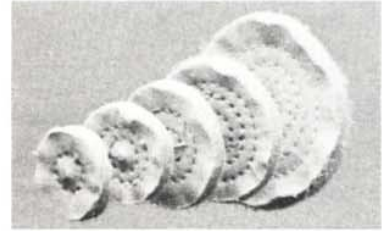

JEWELERS BUFFS

These wheels are made to suit the buffing and polishing requirements of the jewelry industry in the production of costume jewelry. Other industries also use this buff for polishing small metallic and non-metallic parts. The wheels are made to standard specifications (i.e., diameter, ply, sewing) and have shellac centers for use on tapered spindles. Shellac leather centers prevent the center hole from expanding without damaging the threads on the spindles. These buffs are available in 68/72, 80/80, or 86/82 unbleached muslin, 86/82 yellow treated or cotton flannel material. The sizes range from 2" to 8" diameter. All buffs are concentrically sewed.

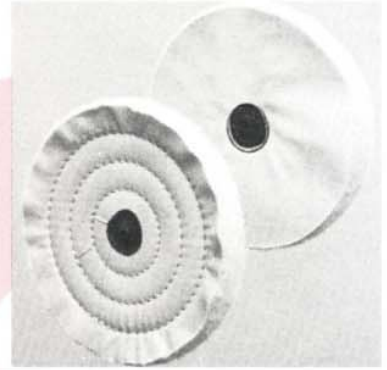

LOOSE BUFFS

Loose Buffs are used in the final buffing and coloring operation to attain either a high lustre or a satin finish. The loose section is held with one row of sewing around the arbor hole. Sections of buffs are made up to the desired face corresponding to the surfaces to be polished on manual lathes. All unbleached muslin buffs can be ordered in a loose weave (60/60 or 68/72) for softness or a tighter weave (80/80 or 86/82) for durability.



SEWED BUFFS

Sewed Buffs are used for buffing and cutting on surfaces which are flat or accessible. Sewed buffs are held together by numerous rows of spiral sewing. Sewing is available in 1/4", 3/8", and 1/2" spacing. Spacing between the rows along with material selection determine the firmness and hardness of each section. The sections are built up on straight shafts to desired faces.



UNBLEACHED MUSLIN BUFFS

STOCK NO.	DIAMETER	PLY	DESCRIPTION	
BUBM-01	1	16	2 row sew	hard pinhole
BUBM-01a	1 1/4	75	4 row sew	hard pinhole
BUBM-01b	1 1/2	60	4 row sew	hard pinhole
BUBM-02	1 1/2	16	2 or 5 row sew	hard pinhole
BUBM-04	2 1/2	30	2 row sew	5/8 arbor
BUBM-05	2 1/2	30	4 row sew	5/8 arbor
BUBM-06	2	16	4 row sew	hard pinhole
BUBM-06a	2 1/2	60	2 or 4 row sew	hard pinhole

UNBLEACHED MUSLIN BUFFS (continued)

STOCK NO.	DIAMETER	PLY	DESCRIPTION	
BUBM-08	3	30 or 35	3 row sew – pieced	HPH or 5/8 arbor
BUBM-10	4	20 or 30	loose to 4 row sew	specify arbor
BUBM-12 to 14	4	40 or 60	loose to 4 row sew	HPH or 1/2 arbor
BUBM-15	4	75	3 row sew	HPH
BUBM-16	6	20	loose	specify arbor
BUBM-17	6	20	1/4 sew	specify arbor
BUBM-18	6	30	4 row sew	specify arbor
BUBM-19	6	40	1/2 sew	specify arbor
BUBM-22	6	60	loose or 1/2 sew	1/2 arbor
BUBM-23	6	60	3-4 row or 3/8 sew	specify arbor
BUBM-24	6	72	1/2 sew	specify arbor
BUBM-25	6	80	loose to 4 row sew	specify arbor
BUBM-25d	7	30	4 row sew	5/8 arbor
BUBM-2 to 27	8	20	loose	L/C to 1 1/4
BUBM-29	8	20 or 30	1/4 or 1/2 sew	1/2 or 5/8 arbor
BUBM-31	8	20, 40 or 50	loose or sewed	specify arbor
BUBM-32	8	60	loose or 1/2 sew	1/2 arbor
BUBM-33 to 37	8	72	loose or sewed	specify arbor
BUBM-40 to 44	10	20	loose or sewed	specify arbor
BUBM-45	10	72	loose	specify arbor
BUBM-47 to 48	10	80	loose or sewed	specify arbor
BUBBC	10	35	loose – balloon cloth	7/8 arbor
BUBM-49 to 53	12	20	loose or 3/8 sew	specify arbor
BUBM-56	12	40	1/4 or 1/2 sew	1 1/8 or 1 1/4 arbor
BUBM-57	12	72	loose	specify arbor
BUBM-58 to 60	14	20	loose or sewed	1/2 – 1 1/4 arbor
BUBM-61	14	40	1/4 sew	1 1/8 arbor
BUBM-62 to 63	16	20	loose or 1/4 sew	1 1/8 arbor
BUBM-64	16	72 or 80	loose or 1/4 sew	1 1/8 – 1 1/4 arbor

YELLOW TREATED MUSLIN BUFFS

STOCK NO.	DIAMETER	PLY	DESCRIPTION	
BUYT-1 to 1b	1 to 4	16, 40 or 60	sewed	hard pinhole
BUYT-2 to 3	6	20	loose	1/2 or 5/8 arbor
BUYT-5	6	60	4 or 5 row sew	HPH to 5/8 arbor
BUYT-6	6	20	3/8 sew sew	1 1/8 arbor
BUYT-8	8	50 or 60	loose or 3/8 sew	HPH to 3/4 arbor

Rev. 5/97 ** Additional sizes available by special order.